



UV-B Narrowband PL-L/PL-S

PL-L 36W/01/4P 1CT/25

More than 400 independent clinical studies have proven that the UVB Narrowband PL-L/PL-S lamps are safer and more effective than any other lamps in their class. The PL-L/PL-S versions provide additional design freedom for system manufacturers since these are space-saving compact, single-ended lamps. Further flexibility is assured since they use the same lamp caps as general lighting lamps, they also use the same universal ballasts. Their best-in-class treatment effectiveness is a result of their very narrow waveband emission: between 305 and 315 nm with a peak at 311 nm. This is the most efficacious waveband for the treatment of psoriasis, and is therefore much more focused. As a result, exposure times are much shorter and this in turn leads to a reduction of side effects such as reddening of the skin and itching. All of this makes them ideal for phototherapy treatment of diseases such as psoriasis and vitiligo. What's more, because the overall dosage of this narrowband radiation can be closely controlled, these lamps are suitable for home therapy. N.B.: Our UVB lamps are NOT registered with FDA as medical devices as they are NOT packaged or labeled for commercial distribution for health-related purposes. US customers are referred to the UVB and UVA lamp range brochure US version.

Product data

| General Information | |
|------------------------------------|--------------|
| Cap-Base | 2G11 [2G11] |
| Main Application | Phototherapy |
| Life to 50% Failures Preheat (Nom) | 1000 h |
| Useful Life (Nom) | 1000 h |
| Light Technical | |
| Color Code | 01 |
| Chromaticity Coordinate X (Nom) | 228 |
| Chromaticity Coordinate Y (Nom) | 230 |

| UV Depreciation at 500 h | 15 % |
|---------------------------|---------|
| UV Depreciation at 1000 h | 20 % |
| Operating and Electrical | |
| Power (Rated) (Nom) | 36 W |
| Lamp Current (Nom) | 0.435 A |
| Voltage (Nom) | 105 V |

UV-B Narrowband PL-L/PL-S


| | |
|-----------------------------|-----------------|
| Mechanical and Housing | |
| Cap-Base Information | 4 Pins |
| UV | |
| UV-B Radiation 100 hr (IEC) | 4.8 W |
| UV-B Radiation 5hr (IEC) | 6.2 W |
| Product Data | |
| Full product code | 871150086889340 |

| | |
|---------------------------------|-----------------------|
| Order product name | PL-L 36W/01/4P 1CT/25 |
| EAN/UPC - Product | 8711500868893 |
| Order code | 927903400121 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 25 |
| Material Nr. (12NC) | 927903400121 |
| Net Weight (Piece) | 104.000 g |

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-L 36W/01/4P

| Product | D1 (max) | D (max) | A (max) | B (max) | C (max) |
|-----------------------|----------|---------|----------|---------|----------|
| PL-L 36W/01/4P 1CT/25 | 18 mm | 39 mm | 384.2 mm | 410 mm | 416.6 mm |

Photometric data

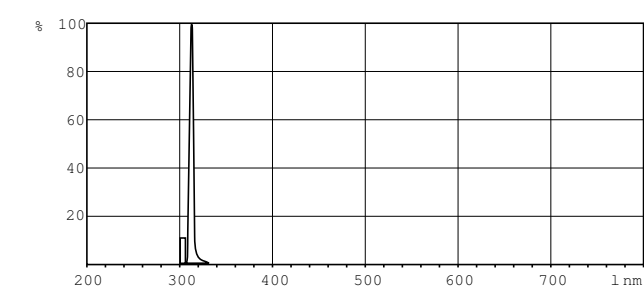

Lightcolor /01

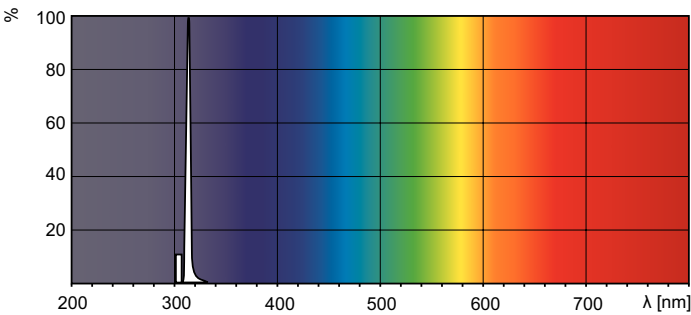

Lightcolor /01

UV-B Narrowband PL-L/PL-S

